

SK32



SK125



SK63

Lo schiacciatiubi è un attrezzo per PE100, PE80, PE63 che facilita e velocizza le operazioni di interruzione del flusso del gas. Le leve di serraggio sono dimensionate in modo da garantire il minimo sforzo durante l'uso. Ganascia inferiore dotata di spine per il posizionamento e centraggio per impedirne il distacco. Fermi di sicurezza multipli e regolabili. Superfici completamente zincate. Peso contenuto per facilitare le operazioni di schiacciamento.


Sigla Code	DIAMETRO DI LAVORO DIAMETER RANGE	SDR SDR	FERMI IN DOTAZIONE COMPLETE WITH PIPE STOP
SK 32	32 mm	11	SDR 11
SK 63	20-25-32-40-50-63 mm	11 - 17,6	SDR 11
SK 125	63-75-90-110-125 mm	(<90 mm 11) - 17,6 - 21	SDR 11 - 17,6
SK 180	63-75-90-110-125-140-160-180 mm	11 - 17,6 - 21	Nessuno - none
PS1	63-75-90-110-125-140-160-180 mm	11	SDR 11
PS2	63-75-90-110-125-140-160-180 mm	17,6	SDR 17,6
PS3	90-125-180 mm	11 - 17,6	SDR 11 - 17,6
PS9	63-75-90-125-180 mm	11	SDR 11
	125-180 mm	17,6	SDR 17,6

Altri PS-- disponibili su richiesta


Gli schiacciatiubi SK sono disponibili anche con QUADRO comando per l'uso con chiavi a cricco da 12,5 mm

Other PS-- available on request

SK squeeze off equipment are available with SQUARE nut to allow ratchet.

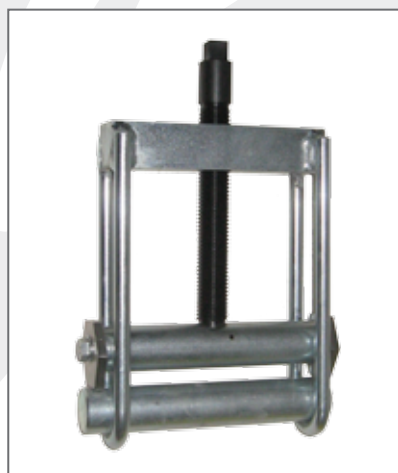

SK180-200

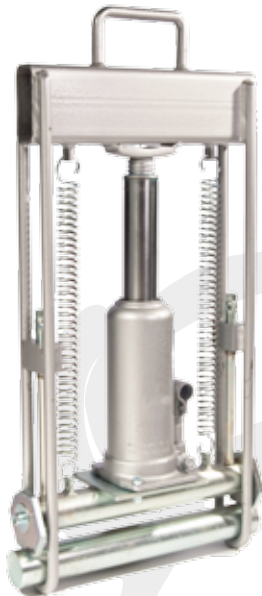

SK400

Squeeze off is a tool for PE100, PE80, PE63 which facilitates and speeds up the interruption of the gas flow. The clamping levers are sized to ensure a minimum effort during use. Lower jaw with pins for the position and centering to prevent detachment. Multiple safety pipes stop and adjustable. Fully galvanized surfaces. Light weight for easier squeezing.



SK250



PS7 - PS8

Sigla Code	DIAMETRO DI LAVORO DIAMETER RANGE	SDR SDR	FERMI IN DOTAZIONE COMPLETE WITH PIPE STOP
SK200	63-75-90-110-125-140-160-180-200 mm	11 - 17,6 - 21	Nessuno - none
PS4	63-75-90-110-125-140-160-180-200 mm	11	11
PS5	63-75-90-110-125-140-160-180-200 mm	17,6	17,6
SK 250	90-110-125-140-160-180-200-225-250 mm	11 - 17,6 - 21	Nessuno - None
PS6	90-110-125-140-160-180-200-225-250 mm	11 - 17,6 - 21	Kit a due misure a richiesta Double size kit on request
SK 400	250-280-315-355-400 mm	11 - 17,6 - 21 - 26	Nessuno - None
PS7	250-280-315-355-400 mm	11 - 17,6 - 21 - 26	Kit una misura a richiesta Single size kit on request
SK 500	315-355-400-450-500 mm	11 - 17,6 - 21 - 26	Nessuno - None
PS8	315-355-400-450-500 mm	11 - 17,6 - 21 - 26	Kit una misura a richiesta Single size kit on request